

hansgrohe


EN	Table of contents	**1**
	Instructions for use / assembly instructions	**2**
	Assembly	**3 - 8**
	Adjustment	**9**
	Dimensions	**10 - 11**
	Flow diagram	**12**
	Operation	**13**
	Spare parts	**14 - 17**
	Cleaning	**18**
	Test certificate	**19**
	Contact information	**20**
SV	Innehållsförtäckning	**1**
	Bruksanvisning / Monteringsanvisning	**2**
	Montering	**3 - 8**
	Inställning av maxtemperatur	**9**
	Måttskiss	**10 - 11**
	Flödesschema	**12**
	Hantering	**13**
	Reservdelar	**14 - 17**
	Rengöring	**18**
	Testsigill	**19**
	Kontaktinformation	**20**



Focus
31823000 (RSK: 8227516)



Talis S² Variarc
14875000 (RSK: 8227158)



Metris
14888000 (RSK: 8227598)



Focus
31803000 (RSK: 8227395)

BRANSCHREGLER SÄKER VATTENINSTALLATION

Accepterad
monteringsanvisning
2021:1

⚠ Safety Notes

⚠ Gloves should be worn during installation to prevent crushing and cutting injuries.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The plumbing codes applicable in the respective countries must be oberserved.

Pressure and tightness test

- The mixer connections must be tested of tightness after installation.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Hot water temperature:	max. 6°C
Thermal disinfection:	70°C / 4 min

The product is exclusively designed for drinking water!

Symbol description



Adjustment (see page 9)

To adjust the hot water limiter.



Dimensions (see page 10)



Flow diagram (see page 12)



Operation (see page 13)

Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.



Spare parts (see page 14)



Cleaning (see page 18)



Test certificate (see page 19)

⚠ Säkerhetsanvisningar

⚠ Handskar ska bäras under monteringsarbete för att undvika kläm- och skärskador.

Monteringsanvisningar

- Det måste undersökas om produkten har transportskador innan den monteras. Efter monteringen accepteras inga transport- eller ytskiktskador.
- De installationsriktlinjer som gäller i länderna ska följas.

Tryck och täthetsprov

- Blandarens anslutningar skall täthetkontrolleras efter installationen.

Tekniska data

Driftstryck:	max. 1 MPa
Rek. driftstryck:	0,1 - 0,5 MPa
Tryck vid provtryckning:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Varmvattentemperatur:	max. 60°C
Termisk desinfektion:	70°C / 4 min

Produkten är enbart avsedd för dricksvatten!

Symbolförklaring



Inställning av maxtemperatur (se sidan 9)

Ställa in varmvattenregleringen.



Måtten (se sidan 10)



Flödesschema (se sidan 12)



Hantering (se sidan 13)

Hansgrohe rekommenderar att den första halvlitern inte används som dricksvatten på morgonen eller efter längre perioder utan användning.



Reservdelar (se sidan 14)




Rengöring (se sidan 18)





Testsigill (se sidan 19)


Assembly (see Page 3)


Montering (se Sidan 3)

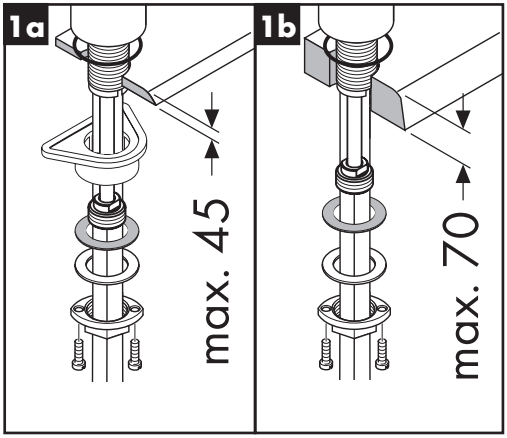

1a
max. 45
1b
max. 70

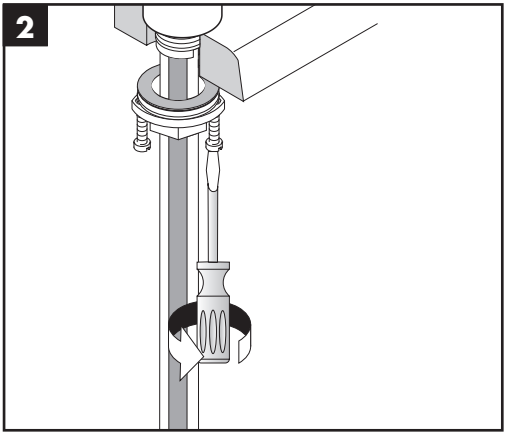

2

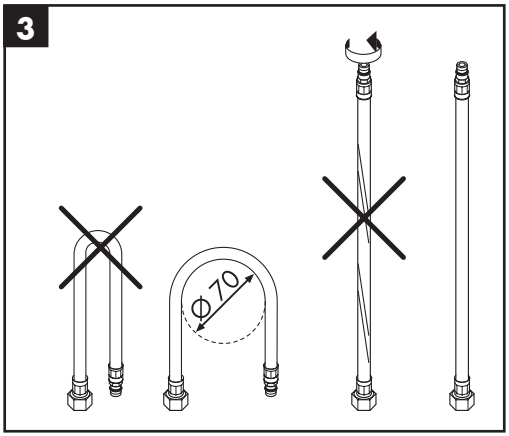

3
ϕ70

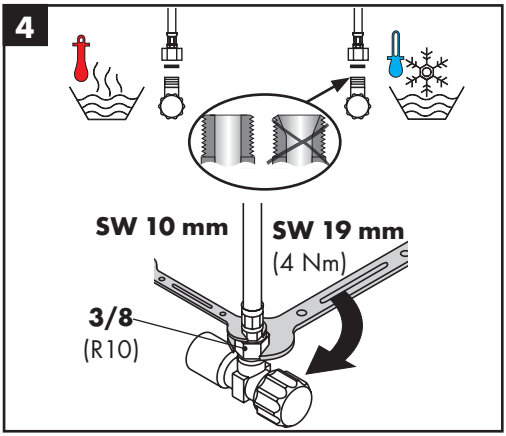

4
SW 10 mm
SW 19 mm
(4 Nm)
3/8
(R10)

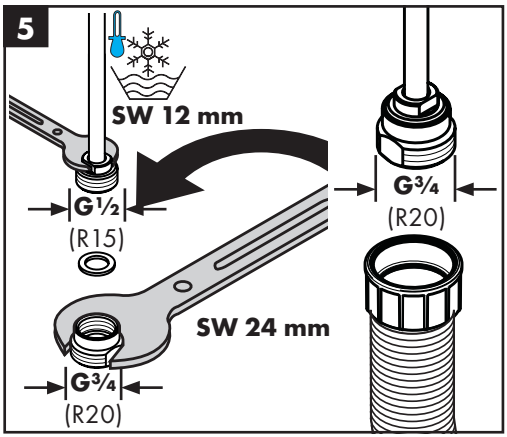

5
SW 12 mm
G½
(R15)
G¾
(R20)
SW 24 mm
G¾
(R20)

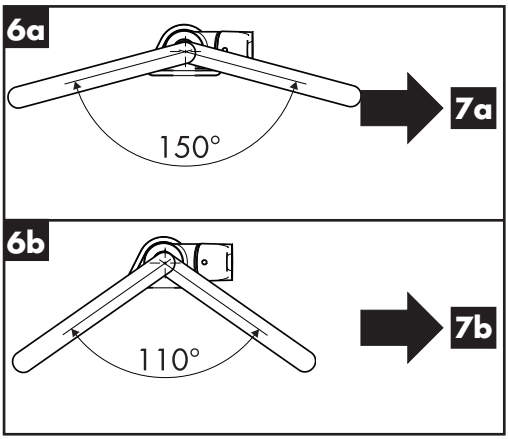

6a
150°
7a
6b
110°
7b

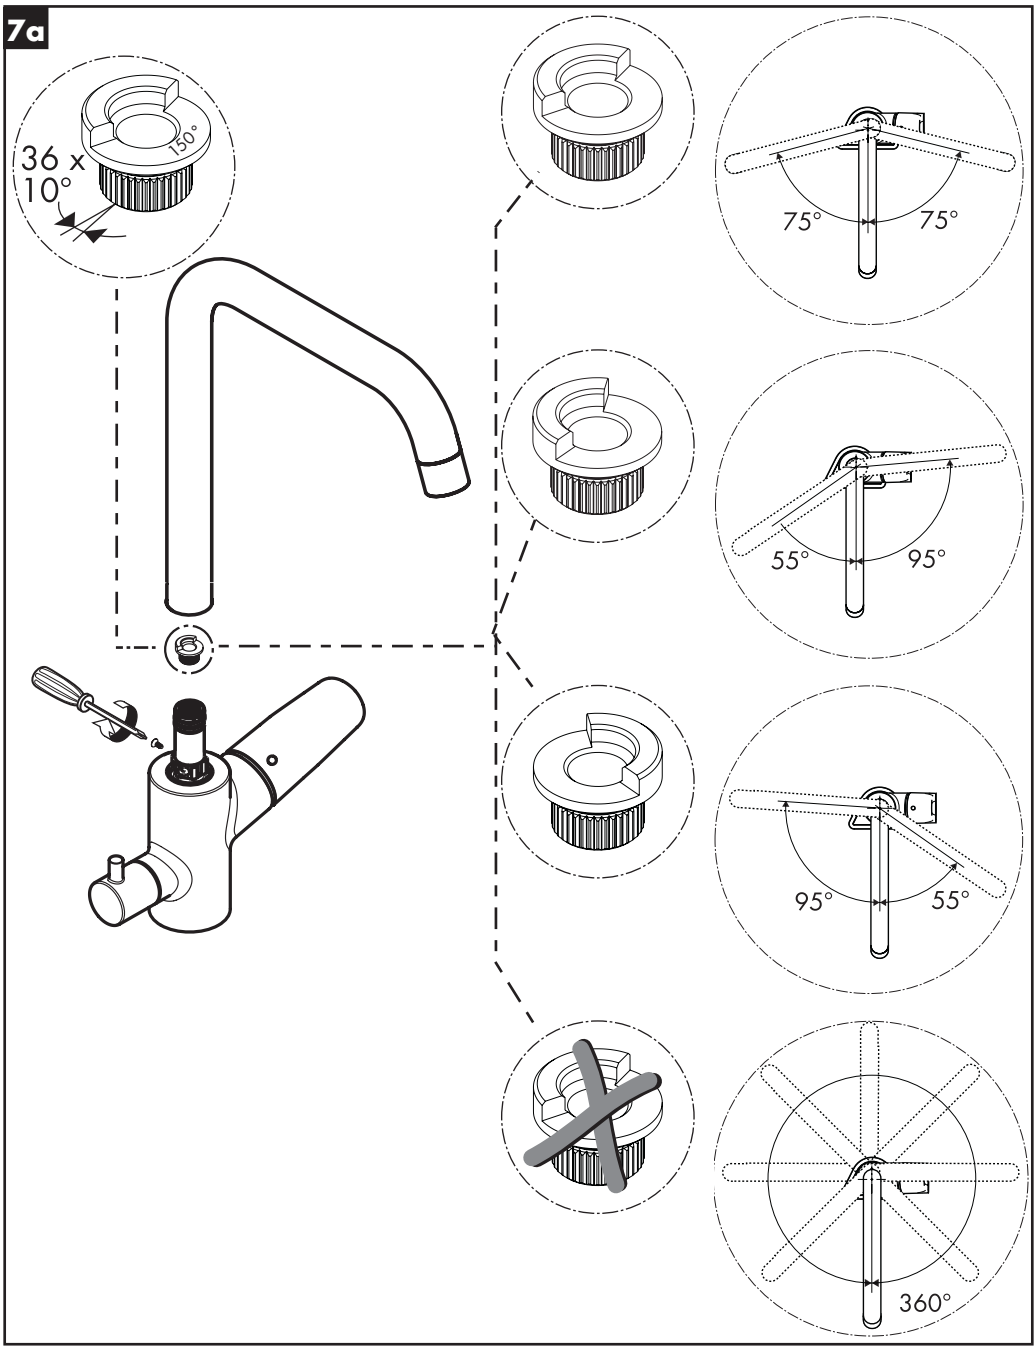

7a
36 x
10°
150°
75°
75°
55°
95°
95°
55°
360°

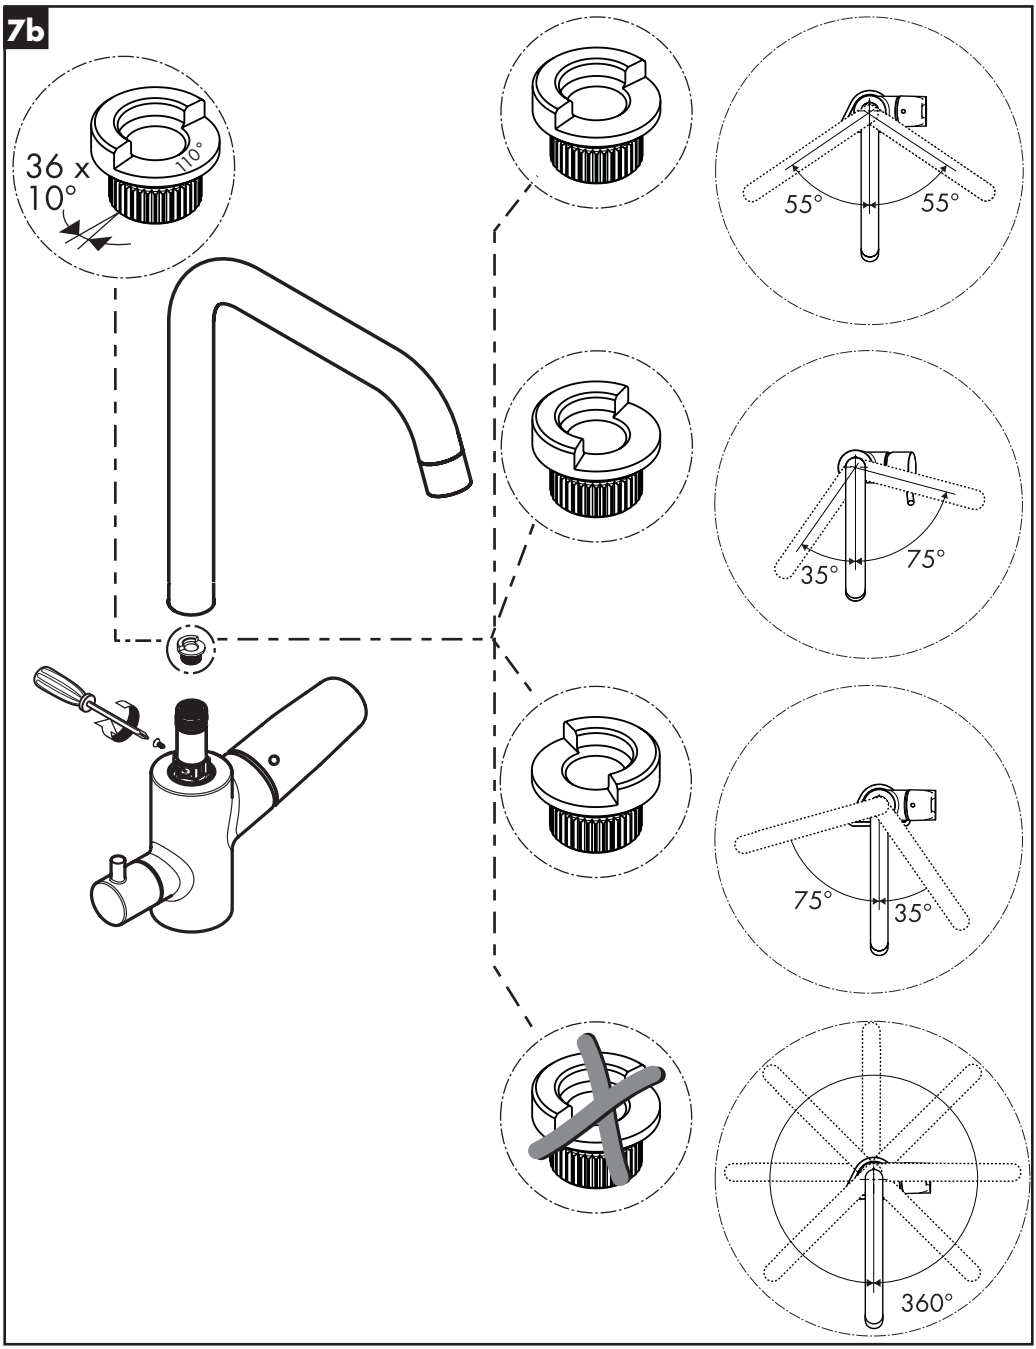

7b
36 x
10°
110°
55°
55°
35°
75°
75°
35°
360°

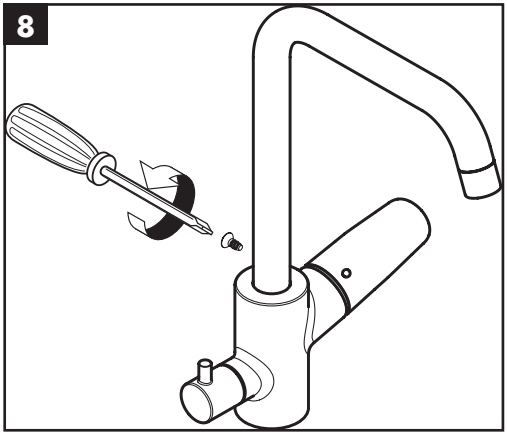

8

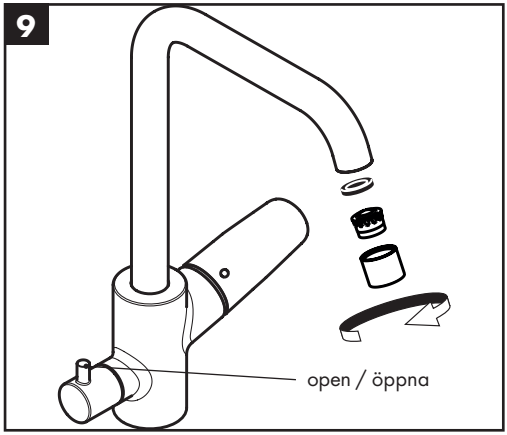

9
open / öppna

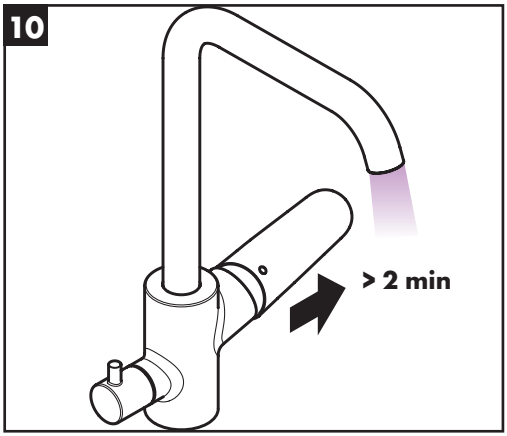

10
> 2 min

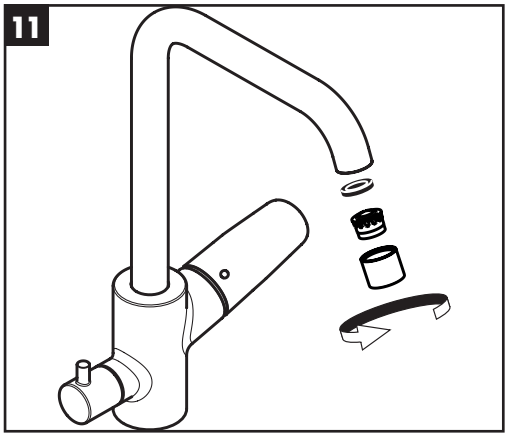

11

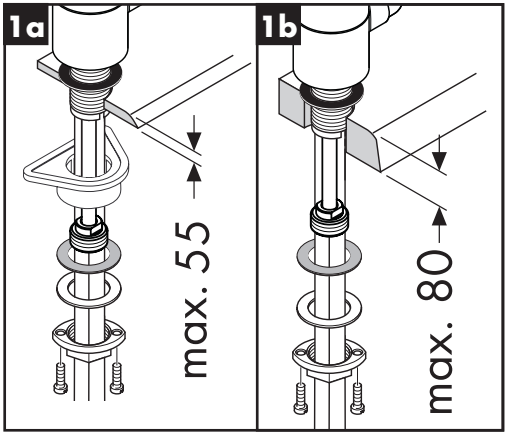

1a
max. 55
1b
max. 80

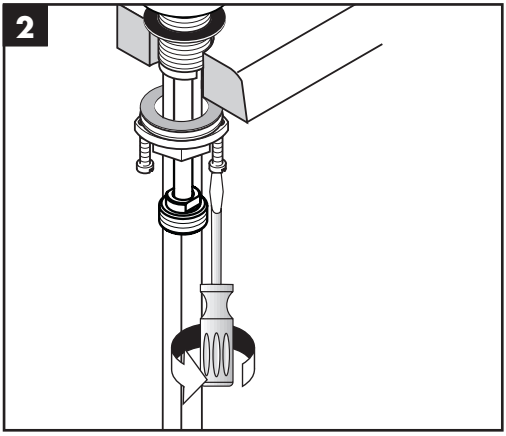

2

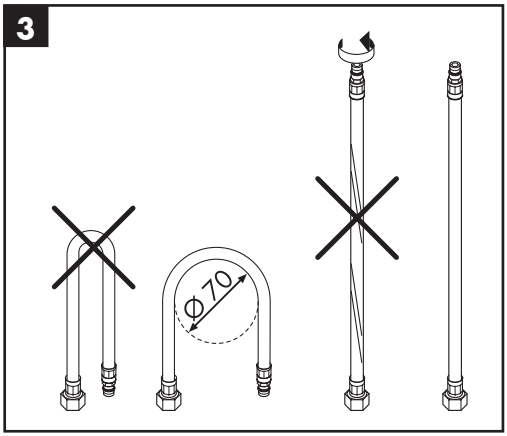

3
Ø70

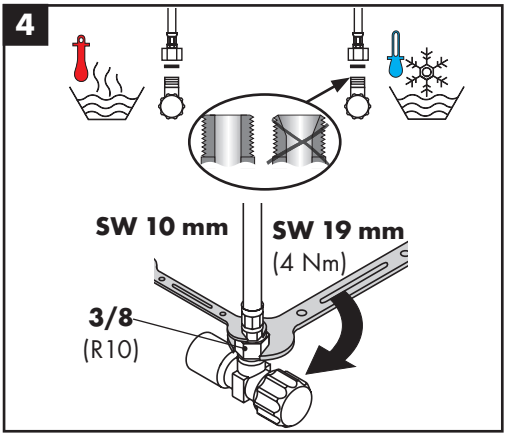
4
SW 10 mm
SW 19 mm
(4 Nm)
3/8
(R10)

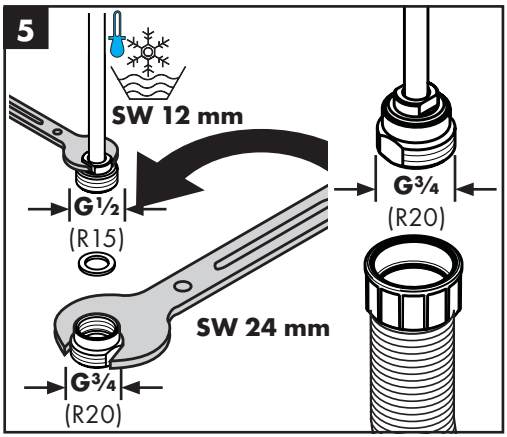
5
SW 12 mm
G½
(R15)
G¾
(R20)
SW 24 mm
G¾
(R20)

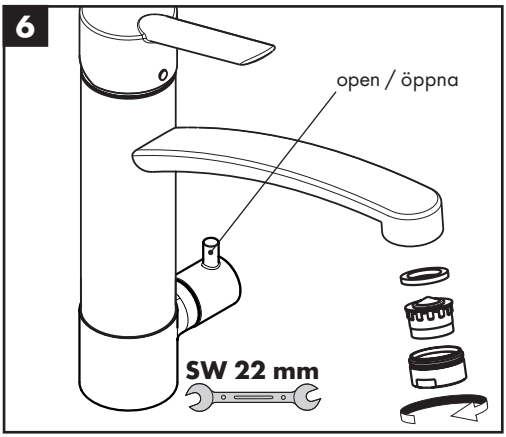
6
open / öppna
SW 22 mm

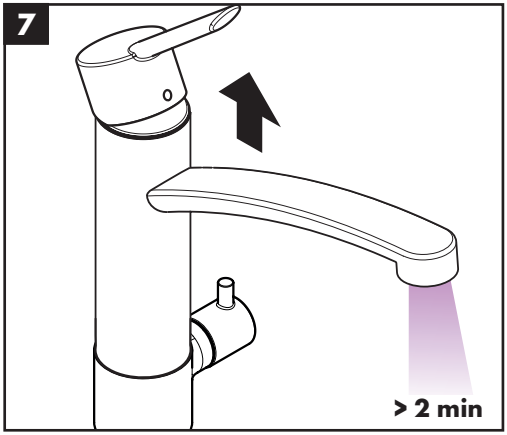

7
> 2 min

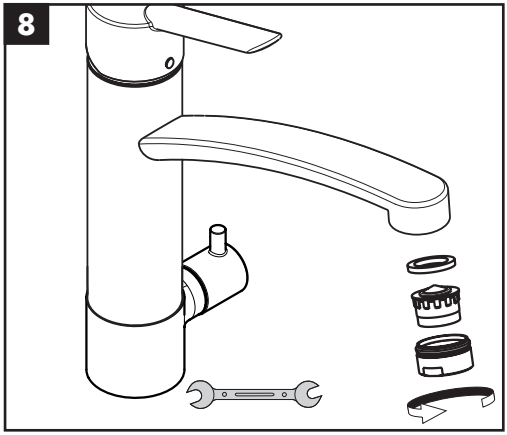

8



60 °C



10 °C



0,3 MPa

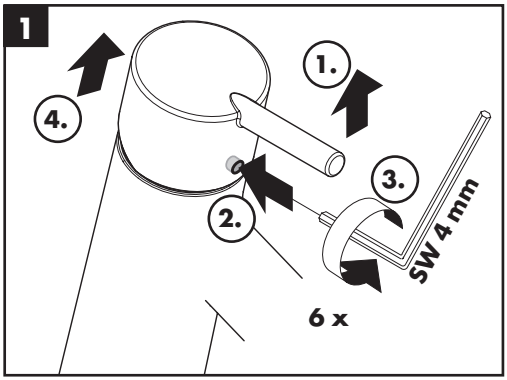

1
4.
1.
3.
2.
SW 4 mm
6 x

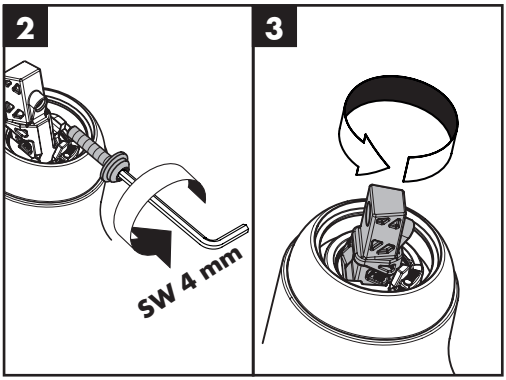
2
SW 4 mm
3

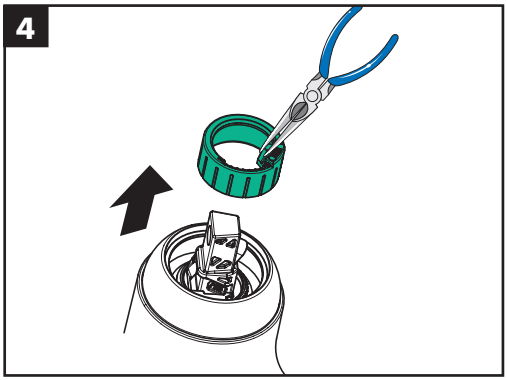

4

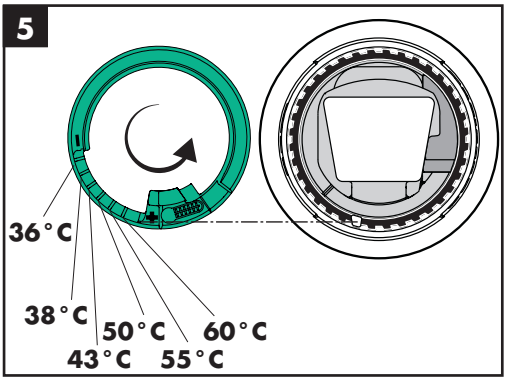

5
36 °C
38 °C
43 °C
50 °C
55 °C
60 °C

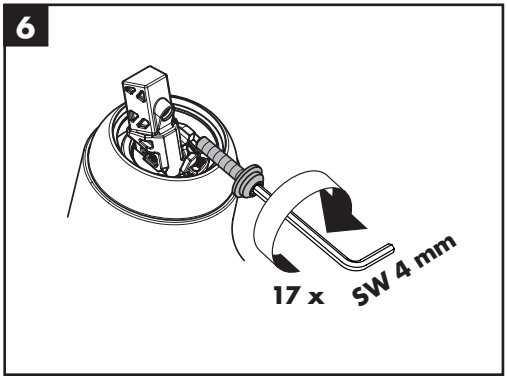
6
17 x
SW 4 mm

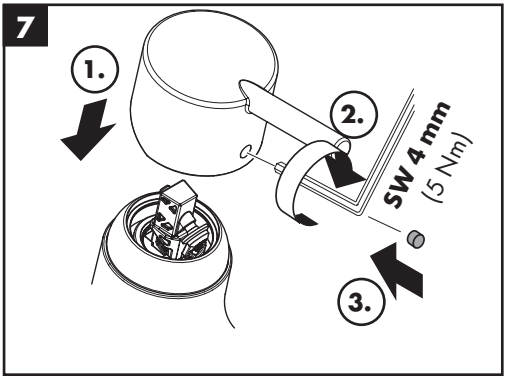

7
1.
2.
SW 4 mm
(5 Nm)
3.


Focus
31823000

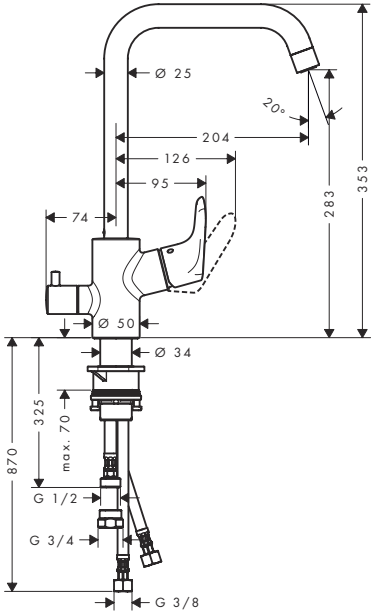




Talis S² Variarc
14875000

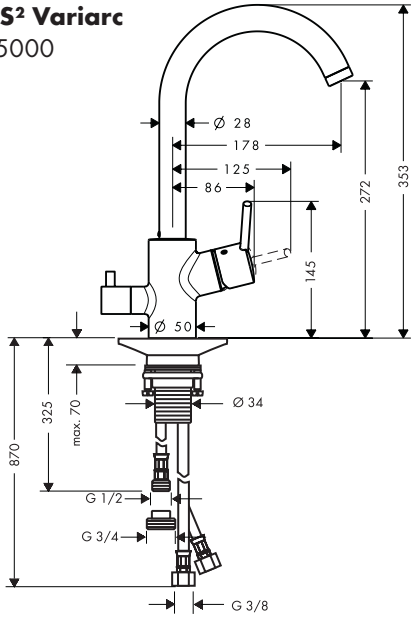




Metris


14888000

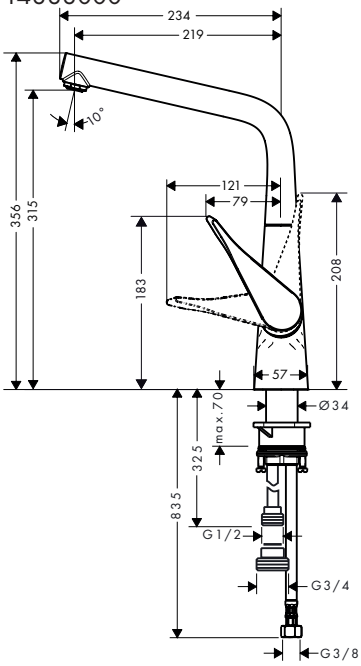





Focus

31803000

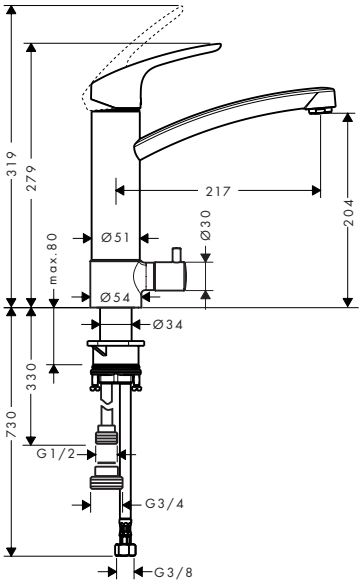


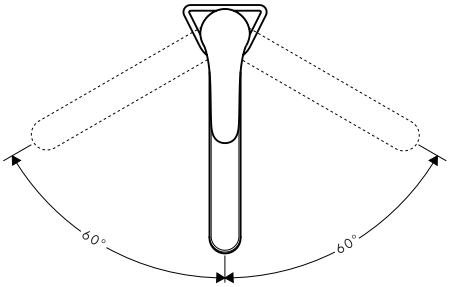


Focus
31823000

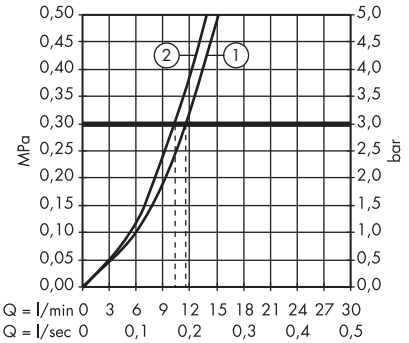


Metris
14888000

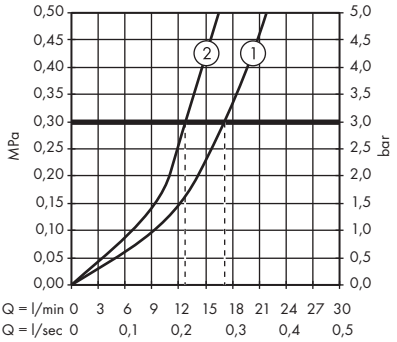


Focus
31803000

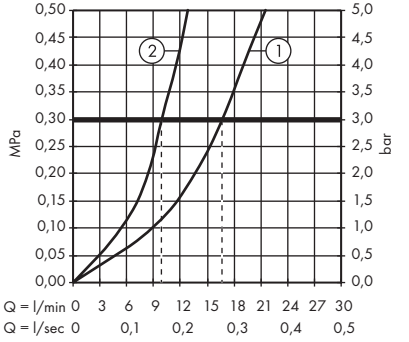


Talis S² Variarc
14875000

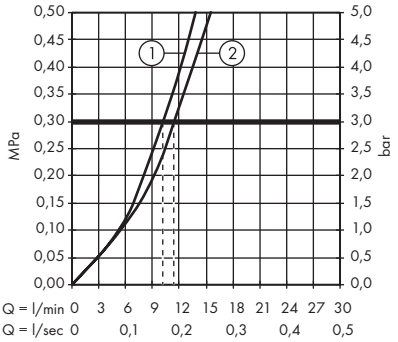


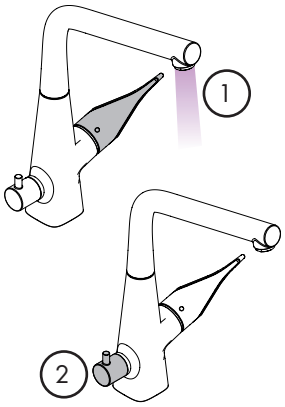


Focus 31823000 / **Talis S² Variarc** 14875000 / **Metris** 14888000

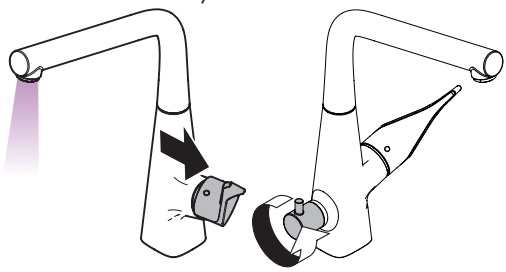


open / öppna

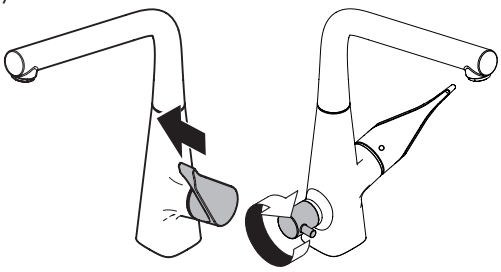

close / stänga




hot / varmt




cold / kallt


Focus 31803000

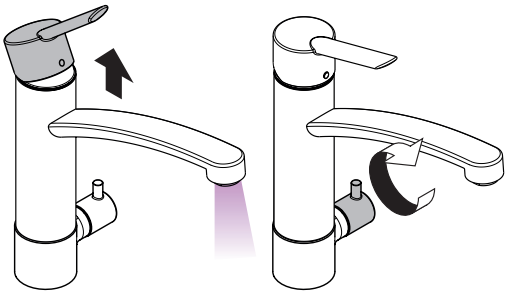


open / öppna

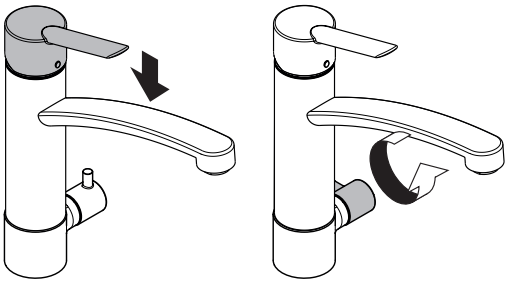

close / stänga




hot / varmt




cold / kallt


Focus
31823000

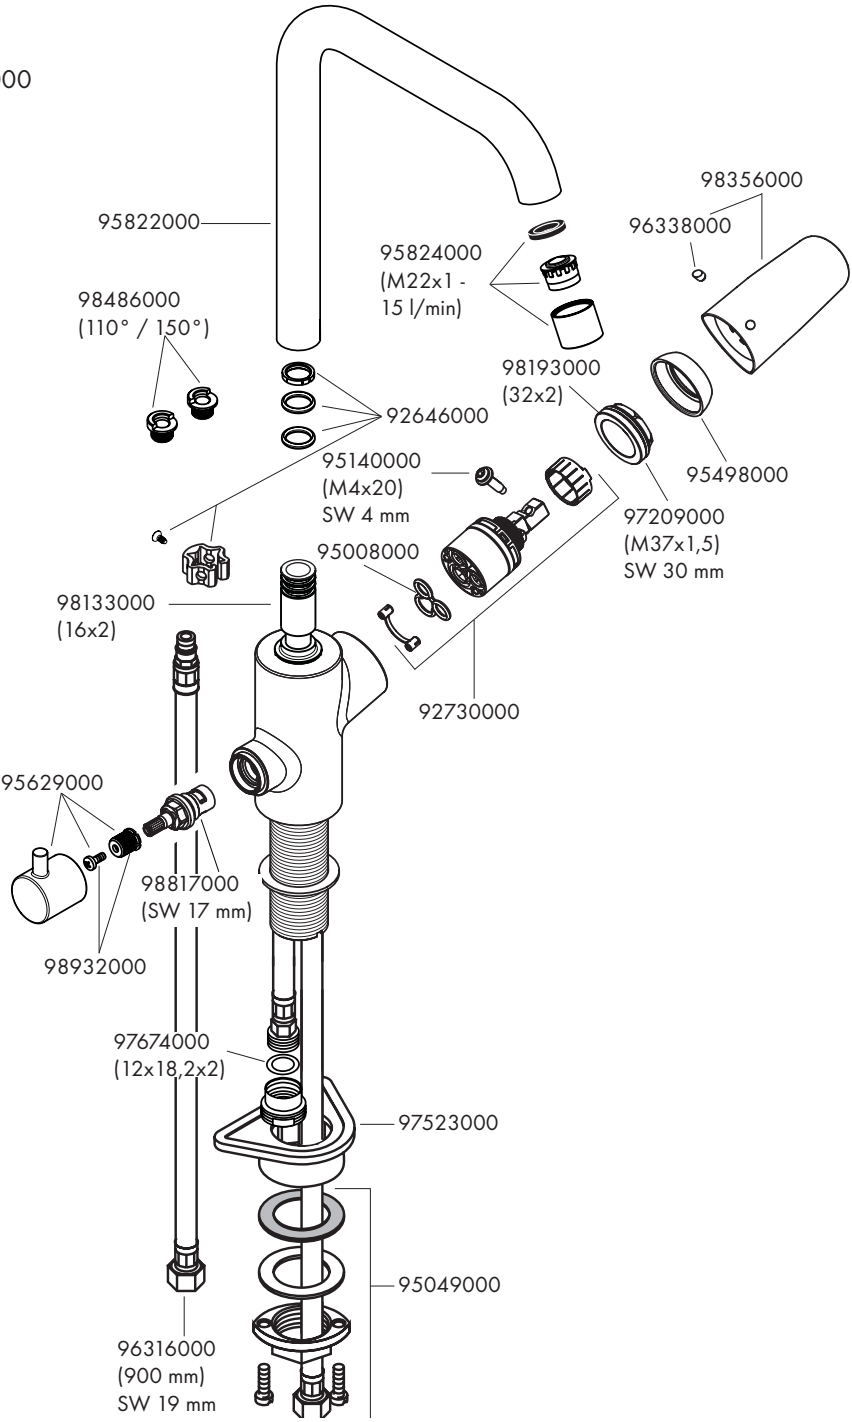


Talis S² Variarc
14875000

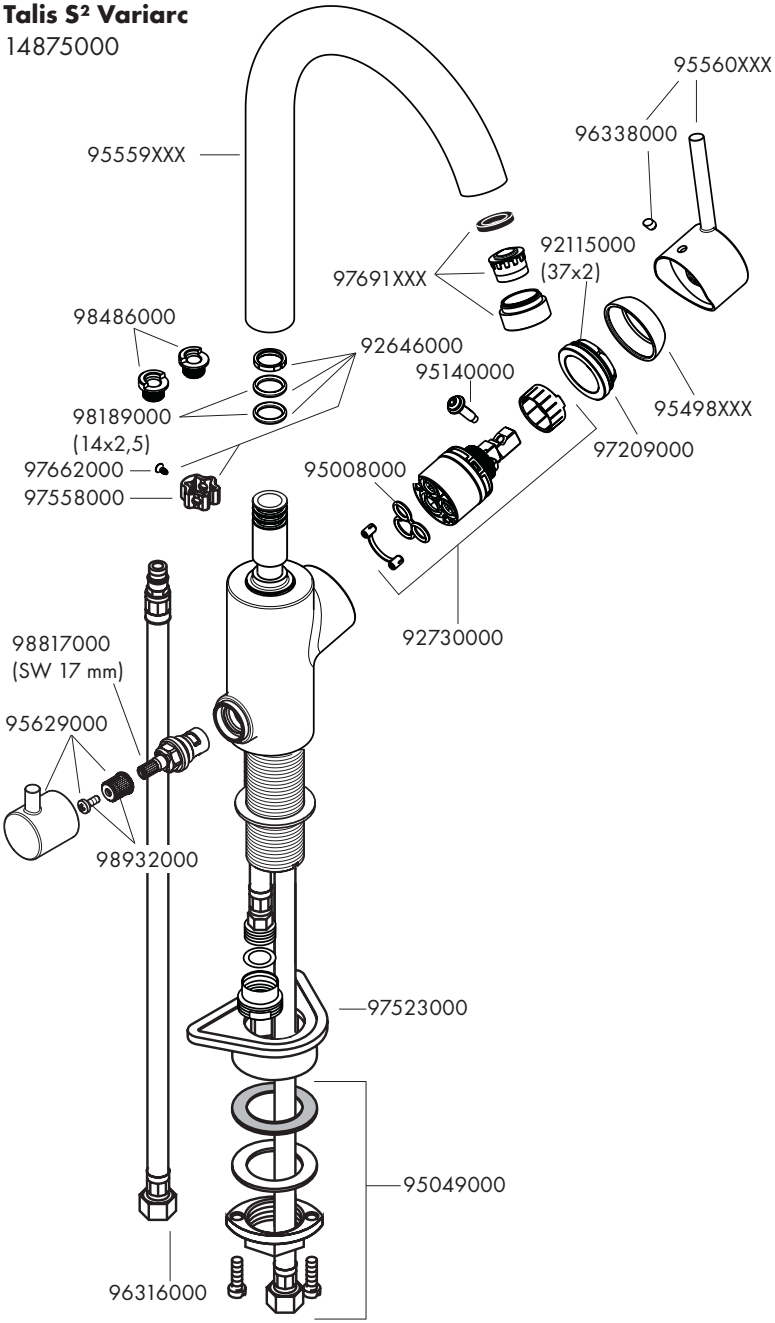

Metris
14888000

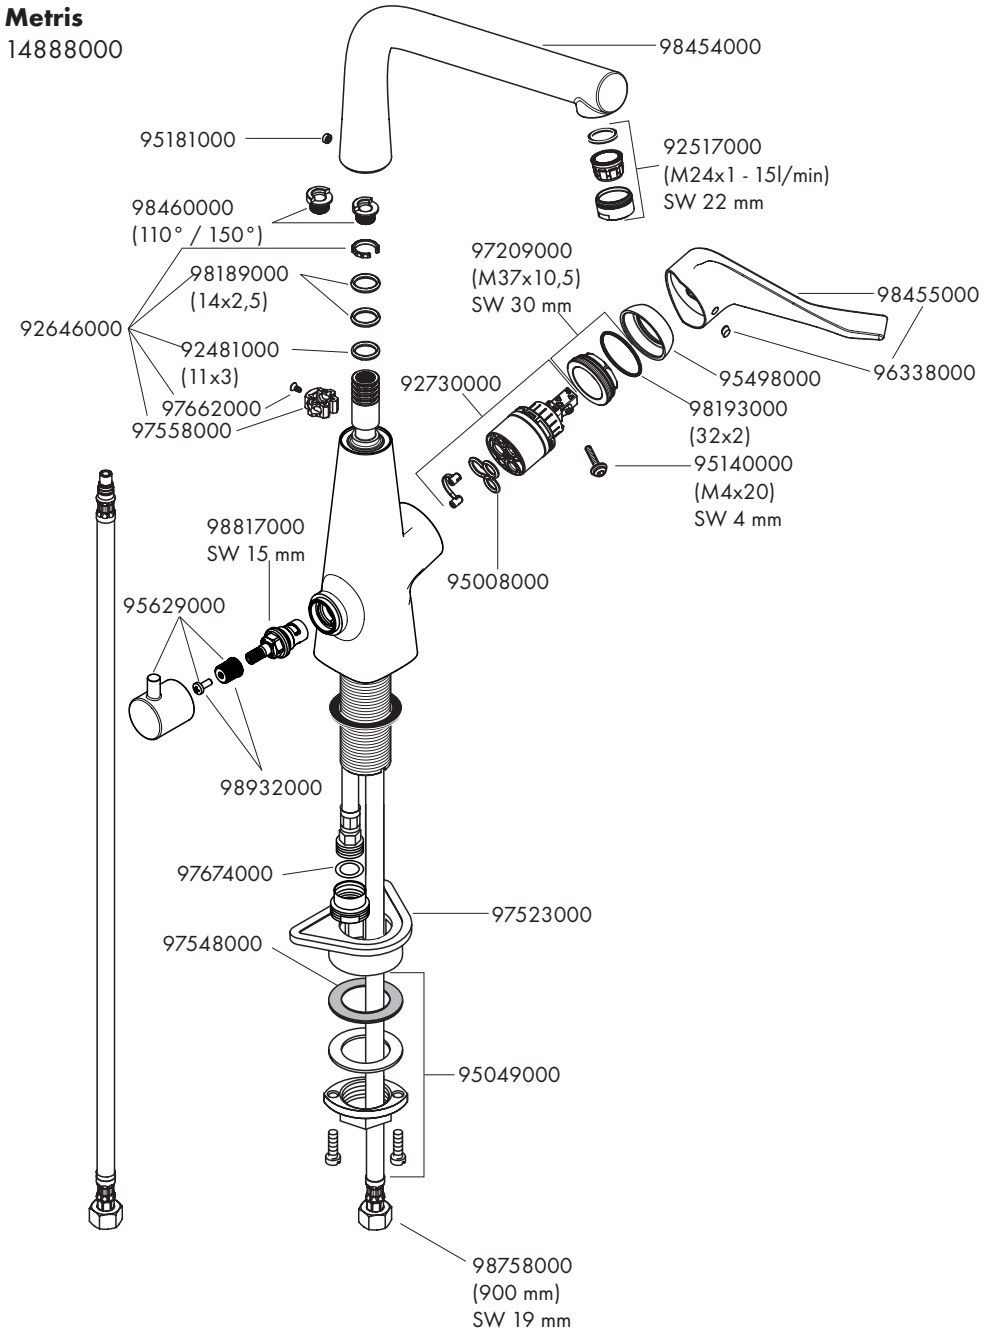


Focus
31803000

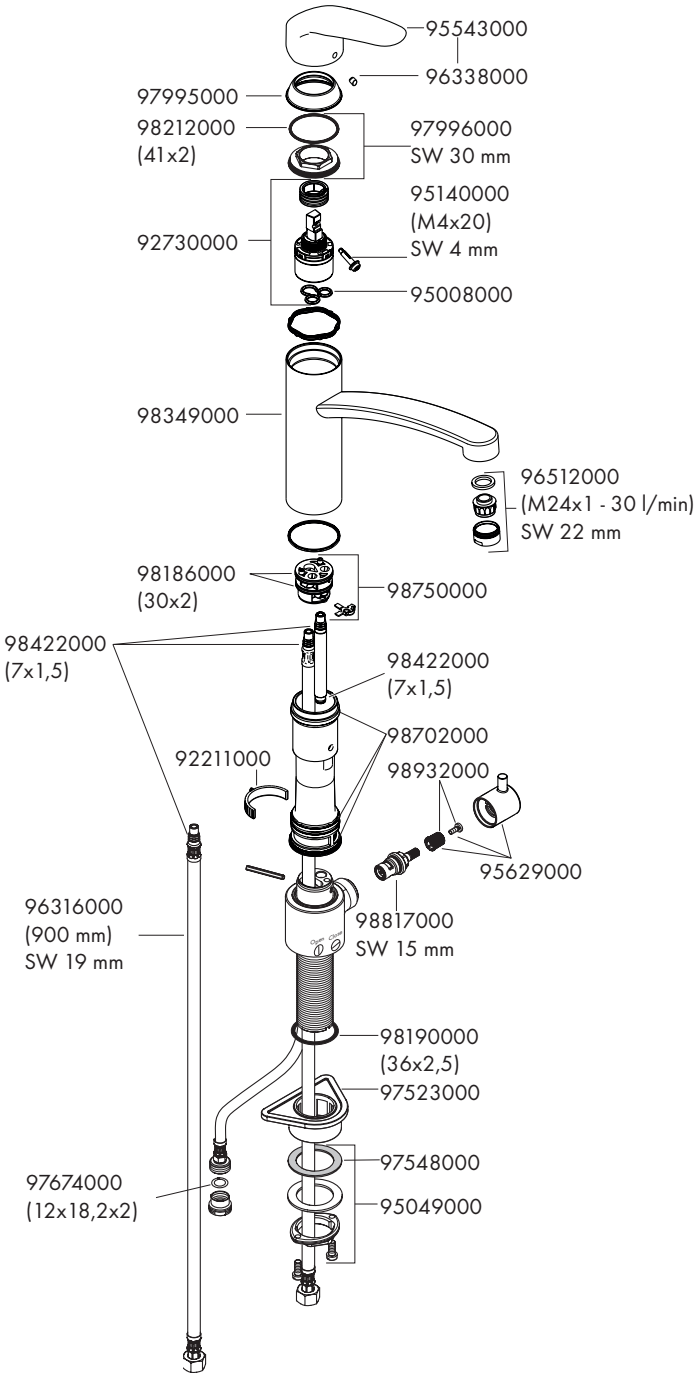



www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation

EN Cleaning recommendation / Warranty / Contact

SV Rengöringsrekommendationer / Garanti / Contacto

14875000	X
14888000	X
31803000	X
31823000	X

hansgrohe
Hansgrohe AB ·Svangatn 2B · 416 68 Göteborg · Tele: +46(0)31-216600 · Fax: +46(0)31-190103
E-post: info@hansgrohe.se · Internet: www.hansgrohe.se

2021-05-07
9.02074.SV